

ZHEJIANG KEJIE NEW MATERIAL CO., LTD

TEST REPORT

SCOPE OF WORK

WPC

REPORT NUMBER

191115007SHF-001

TEST DATE(S)

2019-11-15 - 2019-12-09

ISSUE DATE

2019-12-09


PAGES

8

DOCUMENT CONTROL NUMBER

LFT-APAC-SHF-OP-10k(May 1, 2019)

© 2019 INTERTEK

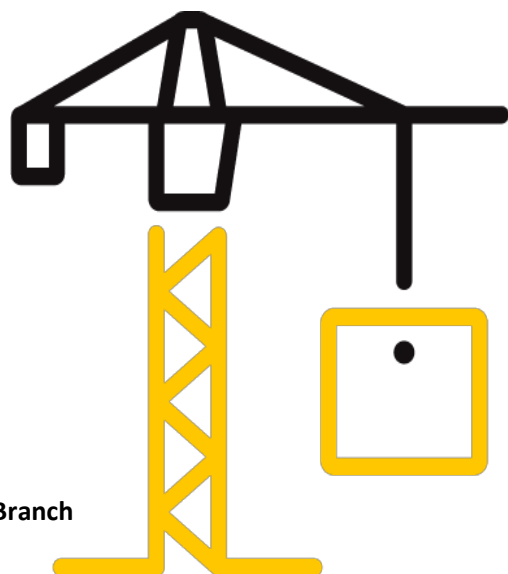

Test Report

Statement

- 1.This report is invalid without company's special seal for testing on assigned page.
- 2.This report is invalid without authorized person's signature.
- 3.This report is invalid where any unauthorized modification indicated.
- 4.Don't copy this report in partial (except full copy) without any official approval in written by our company. This report is invalid without re-stamping the special seal for testing in copying report.
- 5.Any holder of this document is advised that this report is for the exclusive use of Intertek's Customer and is provided pursuant to the agreement between Intertek and its Customer. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. This report was made with due care within the limitation of a defined scope of work and on the basis of information, materials and instructions received from the Customer or its nominated third parties. Intertek is under no obligation to refer to or report upon any facts or circumstances which are outside the specific instructions received and accepts no responsibility to any parties whatsoever, following the issue of the report, for any matters arising outside the agreed scope of the works. The tests results are not intended to be a recommendation for any particular course of action. Customer is responsible for acting as it sees fit on the basis of such results.
- 6.Intertek's written consent is required to use Intertek's name or logo on the object, product or service being tested. The observations and test results in this report relate only to the sample under test. This report alone does not indicate that the item, product or service has passed any Intertek certification program.

Test Report

Issue Date: 2019-12-09 Intertek Report No. 191115007SHF-001
 Applicant: ZHEJIANG KEJIE NEW MATERIAL CO., LTD
 Address: NO.117 XIANXIA ROAD, JIANSAN INDUSTRIAL ZONE, HAINING CITY, ZHEJIANG, PROVINCE, CHINA
 Attn: Chenguang Wang
 Test Type : Performance test, samples provided by the applicant.

Product Information

Product Name	WPC	Brand	/
Sample Description	Good condition	Sample Amount	5 PCS
		Received Date	2019-11-14
Sample ID	Model	Specification	
S191115007SHF.001~004	XFD	150×25	

Test Methods And Standards

Test Standard	ASTM D7031-11(2019) section 5.5, section 5.17, section 5.20, ASTM D6109-19 Method A, ASTM D4060-19, EN 15534-1:2014 Section 8.3.3
Specification Standard	EN 15534-4: 2014 Section 4.5.5
Test Conclusion	The samples were tested according to the above standards, and the results are shown in the following page.

Note:

1.This report relates specifically to the sample(s) that were drawn and provided by the applicant or their nominated third party. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and/or shipment and only relate to the sample(s) as received and tested.

Report Authorized






 Name: Mason Wang Name: Jackie Zhou
 Title: Reviewer Title: Project Engineer

Test Report

Issue Date: 2019-12-09

Intertek Report No. 191115007SHF-001

Test Items, Method and Results:

Test Item: Bending
Test Method: ASTM D7031-11(2019) section 5.5 & ASTM D6109-19 Method A
Conditioning: Condition the test specimens at (23±2°C) and (50±5)% RH for not less than 40 h
Test Speed: 11.8 mm/min
Test Span: 500 mm
Radius of Supports and Loading Noses: 15 mm

Results:

Test Item	Results
Modulus of rupture	Average: 38.8 MPa
Modulus of elasticity	Average: 4570 MPa

Note:

1. The test face was wood grain surface. Refer to sample received photo in Appendix A.

Test Report

Issue Date: 2019-12-09

Intertek Report No. 191115007SHF-001

Test Items, Method and Results:

Test Item: Freeze-Thaw Resistance
 Test Method: ASTM D7031-11(2019) section 5.20 & ASTM D6109-19 Method A
 Test Condition: A total of three cycles of water submersion, freezing, and thawing
 Water submersion: sub-merged underwater for 24h
 Freezing: in a freezer set at -20°F (-29°C) for 24 h
 Thawing: returned to room temperature for a period of 24 h
 Test Speed: 11.8 mm/min
 Test Span: 500 mm
 Radius of Supports and Loading Noses: 15 mm

Results:

Test Item	Results
Modulus of rupture	Average: 40.0 Mpa Rate: 3.1%
Modulus of elasticity	Average: 4375 Mpa Rate: -4.3%
Appearance	No chaping, bubble or peeling after freeze-thaw cycles.

Note:

1. The test face was wood grain surface. Refer to sample received photo in Appendix A.

Test Report

Issue Date: 2019-12-09

Intertek Report No. 191115007SHF-001

Test Items, Method and Results:

Test Item: Abrasion resistance
Test Method: ASTM D7031-11(2019) section 5.17 & ASTM D4060-19
Conditioning: Condition the test specimens at (23±2°C) and (50±5)% RH for at least 24h
Abrasive wheels: CS-17
Test Load: 1000 g per wheel
Revolutions: 1000 r

Test Items	Test Results
Abrasion resistance	Wear Index: 108.8

Note:

1. Wear Index: 1000 times the loss in weight in milligrams per cycle.
2. The test face was wood grain surface. Refer to sample received photo in Appendix A.

Test Report

Issue Date: 2019-12-09

Intertek Report No. 191115007SHF-001

Test Items, Method and Results:

EN 15534-4: 2014 Composites made from cellulose-based materials and thermoplastics (usually called wood-polymer composites (WPC) or natural fibre composites (NFC)) Part 4: Specifications for decking profiles and tiles

Test Items	Test Method	Test Results	Test requirements	Verdict
Boiling Test	EN 15534-1:2014 Section 8.3.3 EN 15534-4: 2014 Section 4.5.5	Water absorption in weight: Mean: 0.43 % Max.: 0.48 %	Water absorption in weight: Mean ≤ 7% Max. ≤ 9%	Pass

Test Report

Issue Date: 2019-12-09

Intertek Report No. 191115007SHF-001

Appendix A: Sample Received Photo



Front View(Test Face)



Back View



Section View

Revision:

NO.	Date	Changes	Author	Reviewer
191115007SHF-001	2019-12-09	First issue	Jackie Zhou	Mason Wang